

Mono Power: 500W
Dimensions: 82.44*44.65*1.38inch




Characteristics

- High efficiency solar cell to keep the modules efficiency reach to 21.05%.
- Positive tolerance to ensure higher output.
- Excellent performance under weak light conditions.
- Modules withstand extremely (temperature, load and impact) TUV certification.
- All modules combination and packing through stepping current to keep effectively reduce mismatch loss.
- 100% EL test to keep higher quality.

Warranty

- 5 year 95% output warranty, 10 year 90% output warranty, 25 year 80% output warranty.
- 12 years material and workmanship warranty.

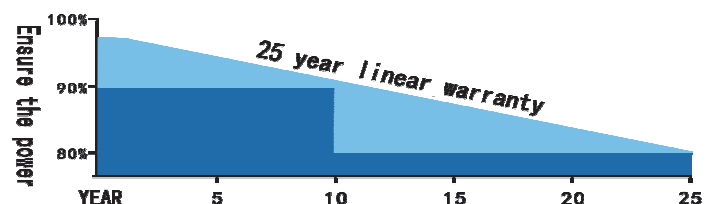

Anodized aluminum frame withstand corrosion and damage, Special osculum can reduce destruction by water freeze.



IP68 junction box long-term weather endurance.



Quality and safety

- ISO9001:2015、ISO14001:2015、ISO45001:2018 certified supplier, we provide world first class solar products for clients.
- TUV,IEC,CEC,CE,CB CA 92618 approved.
- UL61730, CEC Listed

ISO 9001 ISO 14001

SGS TÜV SAAR IEC 61215 IEC 61738

IEC

CB

Green Energy Council

CE

UL

Electrical Characteristics

Model No.	SG500WM
Maximum Power (Pmax)	500W
Max-power Voltage (Vmp)	37.60V
Max-power Current (Imp)	13.30A
Open-circuit Voltage (Voc)	44.36V
Short-circuit Current (Isc)	14.09A
Module Efficiency	21.05%
Operating Temperature	-40°F to 185°F(-40℃~+85℃)
Maximum System Voltage	1500Vdc
Maximum Series Fuse Rating	20A
Power Tolerance	± 3%

*STC condition: 1000 W/m², 1.5AM and 25℃ cell temperature.

Temperature Characteristics

NMOT	46℃±2℃
Temperature Co-efficient of Pmax	-0.36%/℃
Temperature Co-efficient of Voc	-0.28%/℃
Temperature Co-efficient of Isc	0.048%/℃


Mechanical Characteristics

Mono Power	500W
Cell Type	Mono182*91mm
Cell Arrangement	132(6*22)
Dimensions	82.44*44.65*1.38 (2094*1134*35mm)
Weight	56.2lbs(25.5kg)
Front Cover	3.2mm tempered glass
Frame Material	Anodized aluminium alloy
Junction Box	IP68 rated
Output Cables	4mm ² , Length: (+) 300mm/ (-) 300mm

Packing

Packing	40HC
Pieces/Pallet	32
Pieces/container	682

I-V Curve

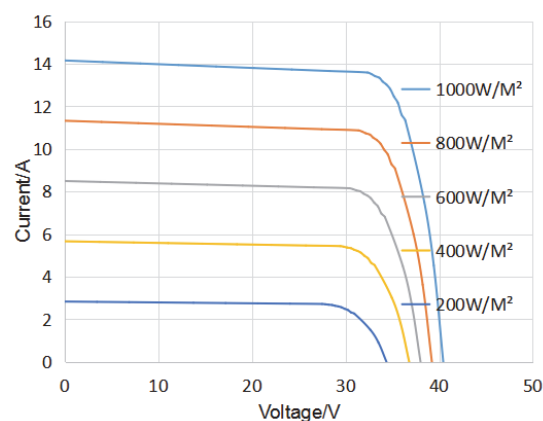

Dimensions

